

DA SHIN SERIES VACUUM

二合一真空泵浦 COMBINATION VACUUM PUMP

泵浦組合流量達到

24.4m³/h (50Hz)

28.9m³/h (60Hz)


- 雙泵浦，齒輪皮帶驅動設計
- 真空，壓力分離運作
- 專為印刷業，各別分離使用者設計

Assembled Flow of Pump is:

24.4m³/h (50Hz)

28.9m³/h (60Hz)

- Dual pump and gear belt driving design
- Vacuum and pressure are separate functioning
- Specially designed for printing industry and separate using.

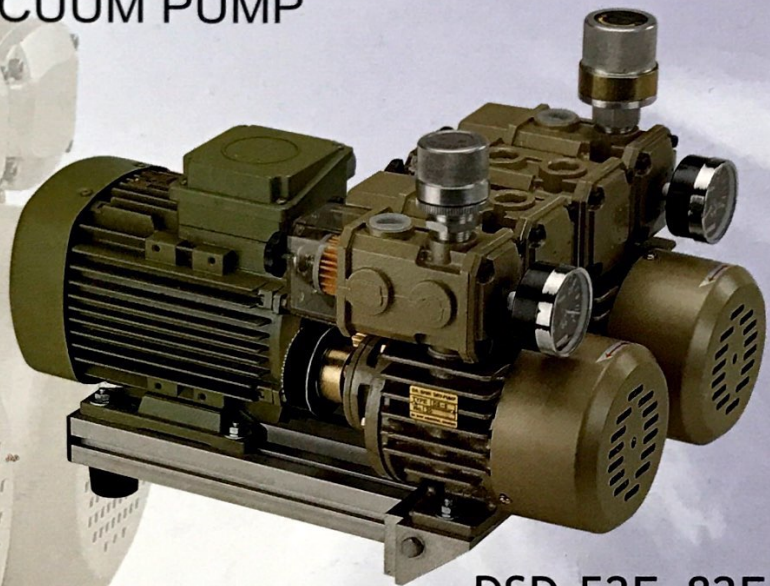

DSD-52E~82E

規格SPECIFICATIONS:

型式 MODEL	轉速 ROTATION	排出流量 DESIGNED EXHAUST VELOCITY	到達真空度 OBTAINABLE VACUUM	使用真空度 FREQUENTLY USE VACUUM	壓力 USUAL EXHAUST PRESSURE	直徑 DIAMETER OF EXHAUST PIPE	馬力 POWER	尺寸 SIZE(LxWxH) (mm)	重量 WEIGHT(kg)			
DSD-52E	1450r.p.m(50Hz)	405//min	660mmHg	Under 450mmHg	0.6kg/cm ²	3/4 PT	3PHASE 1.5Kw4P	560x330x306	COMBINATION WEIGHT 46.5kg			
	1726r.p.m(60Hz)	480//min										
DSD-62E	1450r.p.m(50Hz)	575//min					Under 400mmHg	Under 0.5kg/cm ²	1PT	3PHASE 2.2Kw4P	645x330x306	COMBINATION WEIGHT 61kg
	1720r.p.m(60Hz)	685//min										
DSD-82E	890r.p.m(50Hz)	1130//min		Under 400mmHg	Under 0.5kg/cm ²	1PT	3PHASE 3.7Kw4P	720x590x400	COMBINATION WEIGHT 138kg			
	1050r.p.m(60Hz)	1350//min										