



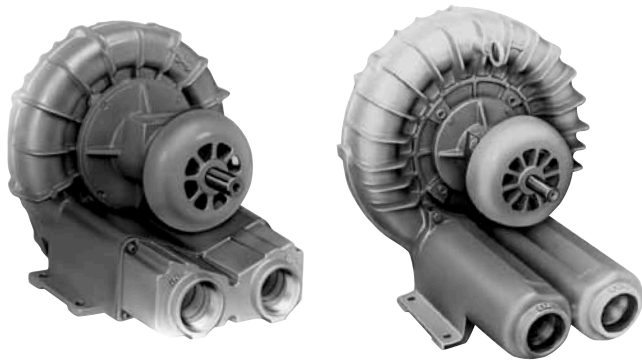


Product Dimensions (inches, mm)


Model SDR4

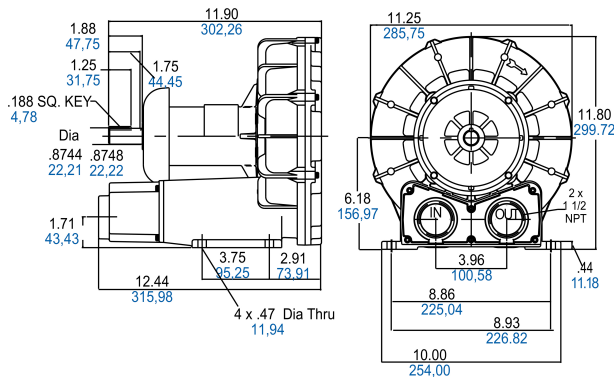

Model SDR5

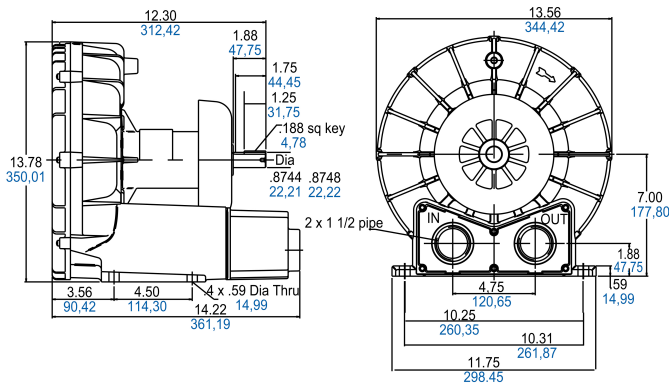

Model SDR6P

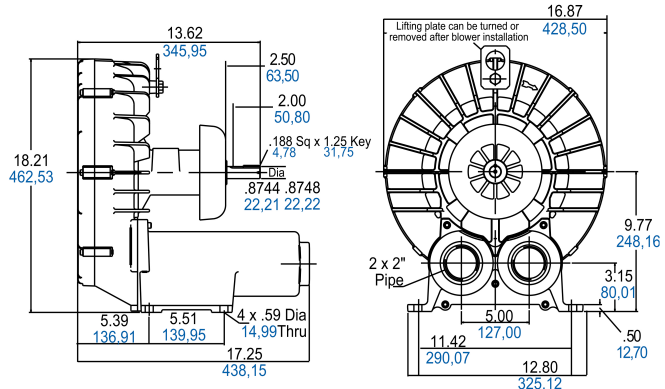

Separate Drive Models

Models SDR4, SDR5, SDR6, SDR6P

Pressure, vacuum, and air flow varies for these models, depending on the RPM. Reference the individual model's performance grids for specific data. The performance charts below reflect maximum duty for each model.

MODELS	Maximum Pressure (inH ₂ O)	Maximum Vacuum (inH ₂ O)	Maximum Air Flow (CFM)
SDR4	110	90	147
SDR5	152	120	240
SDR6	155	135	300
SDR6P	150	125	360

PRODUCT FEATURES

- Oilless operation
- Rugged construction, low maintenance
- Drive pulley size can be changed to lower the speed and change blower performance
- Aluminum cover, impeller, and housing on models SDR4, SDR5, SDR6
- Aluminum impeller, cast iron, and housing on model SDR6P

RECOMMENDED ACCESSORIES

- Pressure gauge AE133
- Inlet filter AJ126D (SDR4)
- AJ126F (SDR5 - SDR6)
- AJ126G (SDR6P)
- Vacuum gauge AE134
- Vacuum in-line filter AJ151E (SDR4)
- AJ151G (SDR5 - SDR6), AJ151H (SDR6P)
- Muffler AJ121D (SDR4, SDR5)
- AJ121F (SDR6, SDR6P)
- Relief valve AG258