- Automatic and compact vacuum plants fitting medical norms in force
- Lubricated rotary vane vacuum pumps EVISA MV type
- Shock mounts
- Electric motors PF55 type – F class (special motors on request)
- Available regulation modes (see the set-up layout)
- Fit to EN 737-3 standard
- Option FLEXO constant vacuum : regulation device allowing to use small capacity receivers
- Remote control through J-BUS connection (RS 485) with CYCLIC 2000 J or PROCOM control boards
- Integrated parallel duplex bacterial filtration
- Delivery pot for condensate recuperation
- Connection for additional receiver (in case of "ON/OFF CONTROL" regulation type)
- Integrated network alarm
- Included suction and exhaust hoses
- Ready-to-run plants

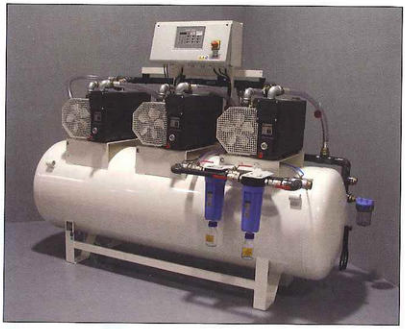

## Characteristics

| | NOMINAL CAPACITY $m^3.h^{-1}$ | | POWER kW | | NOISE LEVEL dB(A) | OIL FILLING L | RECEIVER CAPACITY L | FILTRATION | WEIGHT kg |
|---|---|---|---|---|---|---|---|---|---|
| | 50 Hz | 60 Hz | 50 Hz | 60 Hz | | | | | |
| HOSPIVAC 3 E17 | 3 x 17 | 3 x 20 | 3 x 0,55 | 3 x 0,66 | 59 | 3 x 1,5 | 300 | FD 60 DP | 240 |
| HOSPIVAC 3 E25 | 3 x 30 | 3 x 36 | 3 x 0,75 | 3 x 0,90 | 60 | 3 x 1,5 | 500 | FD 60 DP | 290 |
| HOSPIVAC 3 E40 | 3 x 47 | 3 x 56 | 3 x 1,10 | 3 x 1,30 | 62 | 3 x 1,5 | 500 | FD 130 DP | 320 |
| HOSPIVAC 3 E65 | 3 x 65 | 3 x 78 | 3 x 1,50 | 3 x 1,80 | 65 | 3 x 4,0 | 800 | FD 130 DP | 500 |
| HOSPIVAC 3 E100 | 3 x 96 | 3 x 115 | 3 x 2,20 | 3 x 2,64 | 67 | 3 x 4,0 | 800 | FD 260 DP | 525 |

## Available set-up

| Selected regulation | |
|---|---|
| PROCOM | ■ |
| CYCLIC 2000 J | ■ |
| MILLENIUM | ■ |

■ available

CE 0398

Range complying with 93/42/CE directive

## Standard power supplies

- 3-phase, 400V/50Hz or 460V/60Hz + Neutral
- Other tensions on request

1 STATUS device

2 Vertical vacuum receiver

Specifications are subject to be changed without notice

# Automatic vacuum plants for medical applications

## Dimensions

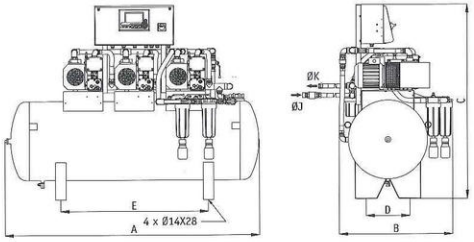


| HOSPIVAC 3 | A | B | C | D | E | ØJ network | ØK exhaust |
|---|---|---|---|---|---|---|---|
| E17 | 1690 | 880 | 1430 | 300 | 995 | 1" | 1" |
| E25 | 1935 | 885 | 1550 | 360 | 1120 | 1" | 1" |
| E40 | 1935 | 885 | 1550 | 360 | 1120 | 1" | 1" |
| E65 | 2405 | 980 | 1780 | 400 | 1500 | 1"1/4 | 1"1/4 |
| E100 | 2405 | 1010 | 1780 | 400 | 1500 | 1"1/2 | 1"1/2 |

Dimensions expressed in mm

## Plant references

| ON/OFF control regulation | E17 R3 | E25 R5 | E40 R5 | E65 R8 | E100 R8 |
|---|---|---|---|---|---|
| HOSPIVAC 3 E AFDP* | 916691 | 916640 | 916642 | 917622 | 917625 |
| HOSPIVAC 3 CJ Exx-AFDP* | 916692 | 915216 | 915217 | 917623 | 917626 |
| HOSPIVAC 3 MIL Exx-AFDP* | 916693 | 916641 | 916643 | 917624 | 917627 |

| FLEXO constant vacuum regulation device | E17 R3 | E25 R5 | E40 R5 | E65 R8 | E100 R8 |
|---|---|---|---|---|---|
| HOSPIVAC 3 PM Exx-AFDP* | 919155 | 919156 | 919157 | 919158 | 919159 |
| HOSPIVAC 3 CJ Exx-AFDP* | 919160 | 919161 | 919162 | 919163 | 919164 |
| HOSPIVAC 3 MIL Exx-AFDP* | 918991 | 918992 | 918993 | 918994 | 918995 |

* : AFDP - parallel duplex filtration

## Accessory and option references

| | E17 R3 | E25 R5 | E40 R5 | E65 R8 | E100 R8 |
|---|---|---|---|---|---|
| **Oil level security** for one pump | 616564 x 3 | | | 619196 x 3 | |
| **Temperature security** for one pump | 618547 x 3 | | | | |
| **Transformer 400V/230V assembly if no neutral current** | | | | | 611099 |
| **FLEXO or ON/OFF external control** | only with CYCLIC 2000J | | weekly clock | | 613996 |
| **Clock forced running** | only with CYCLIC 2000J | | possible if FLEXO control | | 617608 |
| **Audio-warning system for MILLENIUM** | | | | | 618295 |
| 1 **STATUS device** | with PROCOM : 618068 | | with CYCLIC 2000J : 613995 | | |
| 2 **Additional vertical receiver** for ON/OFF CONTROL regulation | | | 500 litres 710486 | 1000 litres 710488 | |

Specifications are subject to be changed without notice