

# DA SHIN SERIES VACUUM



## 老達利式真空泵浦 ROTARY VACUUM PUMP

特點：本機種乃利用油膜止隙、潤滑，以迴轉翼片壓縮空氣，排氣量大、噪音及振動小，真空度高。  
用途：適用於化學、製藥、食品、塑膠、電子、電器、輸送等之蒸餾、乾燥、脫氣、濃縮、含浸、成型、包裝等。

FEATURES: The pump is applying the oil skin to seal the leak, lubricating and compress the air by rotary blades, large discharge capacity, low noise and vibration, top vacuum.  
APPLICATIONS: Suitable for chemical drug manufacturing, plastic, electronic, electric wares, conveying etc., distilling, drying deaerating, shrinkage, impregnation, forming and packaging etc.

RV-1~2

型式 MODEL	馬力 POWER (Hp)	排氣量 Discharge Capacity (L/min)	真空度 Vacuum (Torr)	口徑 Pipe Orifice(in)	迴轉速 Revolution Speed (rpm)	機械尺寸 Machine Size(mm) (LxWxH)	機械重量 Machine Weight (kg)	備註 Remarks
RV-1	1	500	430	7	1	685x310x325	31	氣冷 Aircooling
RV-2	2-3	1100	320	5	11/2	740x370x965	90	氣冷 Aircooling
RV-2W	3	1400	430	3	11/2	740x395x975	105	水冷 Watercooling
RV-3W	5	2200	340	3	2	890x475x1060	170	水冷 Watercooling
RV-4W	7 1/2	3500	340	5	21/2	990x555x1245	237	水冷 Watercooling

附註：不含馬達。The motor without inloded.

## 油封式真空泵浦 OIL SEALED VACUUM PUMP

特性：

採用外箱型，可動兩翼式，自動吸入潤滑油，減少磨損，保持長久高真空度、效率高、體積小、馬力少。

用途：


真空乾燥、濃縮、過濾、蒸發、脫氣、輸送、化驗、製藥、食品等。

FEATURES:

Adoptes of outer box type, and moveable two blades, auto sucking lubricating oil, reduced friction wastage, retain high vacuum degree for long time, high efficiency, little dimension and power.

APPLICATIONS:

Vacuum drying, shrinkage, filting, evaporation, deaerating, conveying, testing, drug manufacturing and food stuff etc.,

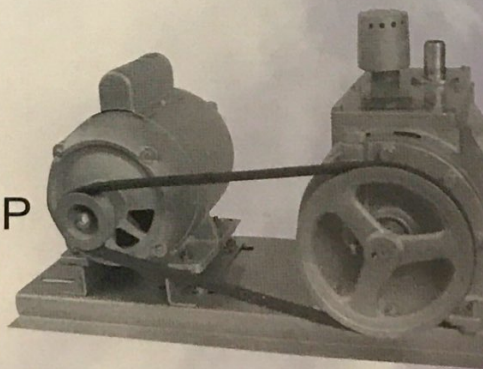

KWV

規格 SPECIFICATIONS:

型式 MODEL	馬力 POWER (Hp)	排氣量 Discharge Capacity (L/min)	迴轉速 Revolution Speed (rpm)	真空度 Vacuum (Torr)
KV-1	1/4	80	600	0.01
KV-2	1/2	150	600	0.01
KV-3	1	300	500	0.01
KV-4	2	500	500	0.01
KWV-2	1/2	120	600	0.001
KWV-3	1	240	500	0.001