
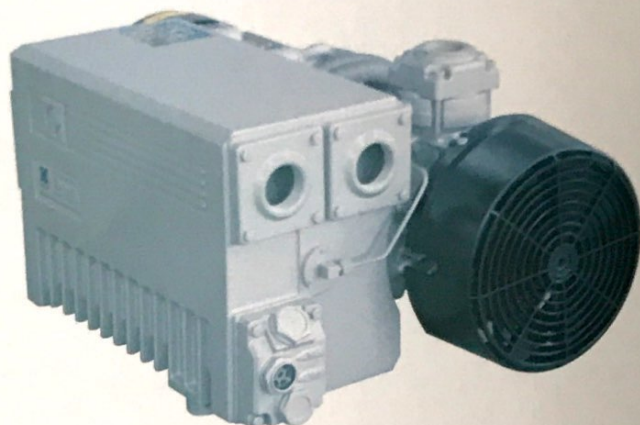


◎ X-40/63/100单级旋片真空泵
X-40/63/100 Single-stage rotary vane vacuum pump

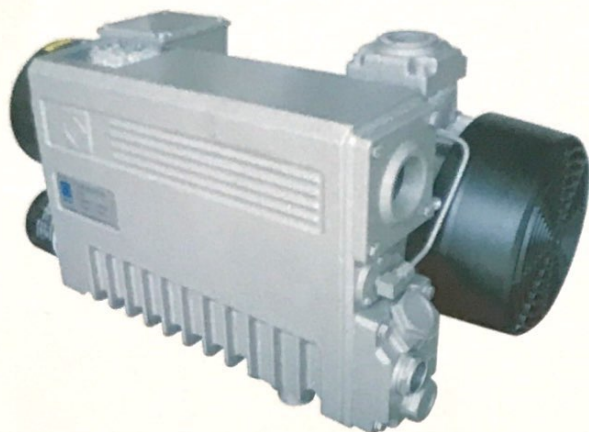


◎ X-40/63/100单级旋片真空泵技术参数
X-40/63/100 Technical parameter for single-stage rotary vane vacuum pump

项目ITEMS \ 型号MODEL	单位Units	X-40	X-63	X-75	X-100
额定抽速/Rated Speed	m ³ /h	40	63	75	100
极限压力/Utmost Pressure	mbar	0.1-0.5	0.1-0.5	0.1-0.5	0.1-0.5
噪音/Noise	dB(A)	64	65	65	66
工作温度/Work temperature	℃	83	84	84	85
用油量/oil consumption	L	1.5	2	2	2
水蒸气允许压力/Vapor permitted pressure	mbar	40	40	40	40
水蒸气抽除率/Suction rate of vapour	kg/h	0.6	1	1.2	1.6
进气口螺纹/Whorl of inlet	inch	Rp1 $\frac{1}{4}$ "	Rp1 $\frac{1}{4}$ "	Rp1 $\frac{1}{4}$ "	Rp1 $\frac{1}{4}$ "
排气口螺纹/Whorl of outlet	inch	Rp1 $\frac{1}{4}$ "	Rp1 $\frac{1}{4}$ "	Rp1 $\frac{1}{4}$ "	Rp1 $\frac{1}{4}$ "
电机额定功率/Motor rated power	kW	1.1	1.5	1.5	2.2
电机额定转速/Motor rated rotating speed	rpm	1440	1440	1440	1440
整机重量/Total weight	kg	48	58	60	72
外形尺寸/Vacuum pump size	cm	65 × 30 × 28	65 × 43 × 29.5	67 × 43 × 29.5	72 × 43 × 29.5

◎ 真空度曲线/Vacuum curve

标准排量
Nominal
displacement

m^3/h
↑
S

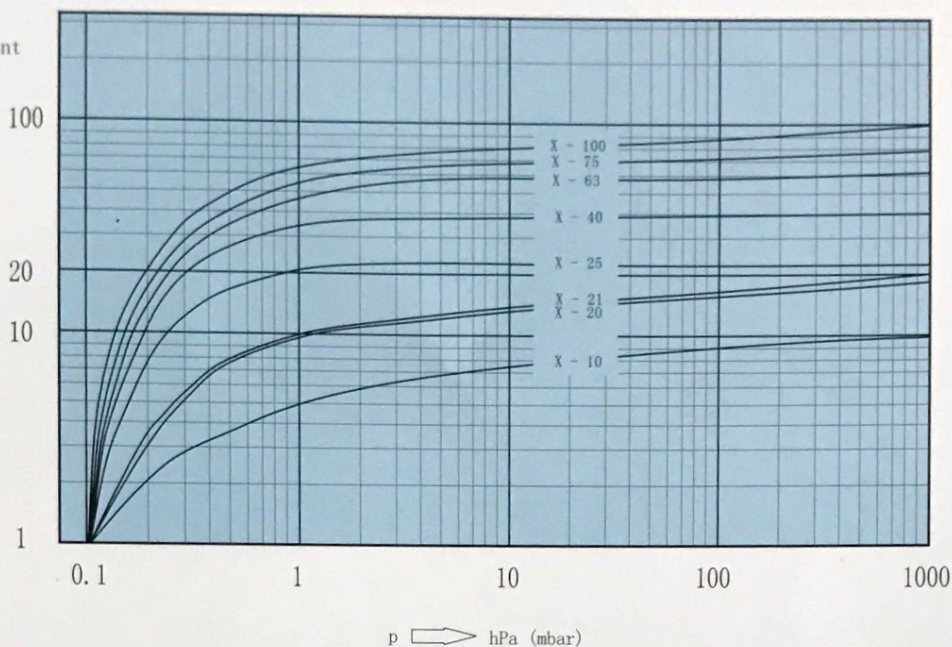

◎ 安装尺寸/Mounting Dimensions

尺寸 Dimensions	A	B	C	D	E	F	G	H	I
X-40	650	150	290	195	270	185	300	280	55
X-63	650	150	265	295	285	278	430	295	—
X-75	670	160	280	295	285	278	430	295	—
X-100	720	180	295	295	285	278	430	295	—

